



Tumble dryer

T5250

Features and benefits

- High productivity – 2 full loads per hour
- Low energy consumption for optimal efficiency
- Large door opening for easy loading and unloading
- Large selfcleaning lint screen for easy maintenance
- Reversible door hanging for a convenient laundry flow
- Easy access to vital parts from front and rear for simple servicing
- With Compass Pro program control
 - Large display and one control knob for easy program selection
 - Language selection
 - Quick selection and option buttons for the most frequently used drying programs and options
 - Drying program packages optimized for Economy, Care and Time and option buttons for selection of dryness
 - Service program for adjustment of parameters
 - USB connection
- The coin version with Ecopower to avoid over drying of the garments and get a lower energy consumption

Main options

- Stainless steel front
- Stainless steel drum
- Residual Moisture Control – RMC
- Reversing drum
- Payment: coinmeter with Ecopower, chipcard reader, CP connection
- Special versions (dryer + option package): Lagoon® variant includes stainless steel front, stainless steel drum, RMC and reversing drum
- Fresh air intake
- Supply disconnecter
- CMIS (Certus Management Information System)



Images shown are a representation of the product only and variations may occur.

| Main specifications | | | T5250 | | | | |
|-------------------------------------|------------------|------------|--------------|------|---------|------|-------|
| Rated capacity, filling factor 1:18 | kg/lb | | 13.9/30.7 | | | | |
| | | | 11.4/25.1 | | | | |
| Drum volume | litre | | 250 | | | | |
| Drum diameter | mm | | 760 | | | | |
| Heating, | electric | kW | 6/9/13.5 | | | | |
| | gas | BTU/h (kW) | 46000 (13.5) | | | | |
| | steam at 800 kPa | | 25 | | | | |
| Consumption data* | | | 6 kW** | 9 kW | 13.5 kW | Gas | Steam |
| Total time full load | min | | 36 | 36 | 27 | 27 | 18 |
| Energy consumption full load | kWh | | 3.9 | 5.5 | 5.8 | 6.2 | 13 |
| Evaporation | g/min | | 111 | 160 | 214 | 211 | 326 |
| Energy kWh/litre water evaporated | kWh/l | | 0.98 | 0.95 | 1.02 | 1.09 | 2.23 |

* At rated capacity 100% cotton load at 50% initial moisture dried to 0%.

** Test load 8.2 kg/18lb



Electrical connections*

| Heating alternative | Main voltage | Heating power kW | Total power kW | Recommended fuse A |
|-----------------------------|--------------|------------------|----------------|--------------------|
| | Hz | | | |
| Electric heated | ??? | | | |
| Gas heated/ Steam heated | | | | |

Steam, gas and air connections

| T5250 | | |
|--------------------------|-----------|-----------|
| Steam | ISO 7/1-R | 1" |
| Steam pressure | kPa | 100-1000 |
| Steam consumption | kg/h | 65 |
| Condensate | ISO 7/1-R | 1" |
| Gas | ISO 7/1-R | 1/2" |
| Gas pressure | | |
| Natural gas | Pa | 2000 |
| | mbar | 20 |
| Propane | Pa | 2800-5000 |
| | mbar | 28-50 |
| Air outlet | ø mm | 200 |
| Evacuated air, | m³/h | 360 |
| el 6/9 kW | | 600 |
| el 13.5 kW | | 600 |
| gas 13.5 kW | | 1000 |
| steam | | 650 |
| Pressure drop | Max. Pa | 520 |
| el 6/9 kW | | 270 |
| el/gas 13.5 kW | | |
| el 18 kW/gas 21 kW/steam | | |

Sound levels

| | | |
|----------------------|-------|-----|
| Airborne sound level | dB(A) | <70 |
|----------------------|-------|-----|

Heat emission

| | | |
|---------------------------|--|----|
| % of installed power, max | | 15 |
|---------------------------|--|----|

Shipping data


| | | |
|-----------------|------------|------|
| Weight | net, kg | 169 |
| Shipping volume | crated, m³ | 1.92 |

Dimensions in mm


| | | |
|------|-------------------|------|
| A | Width | 790 |
| B(a) | Depth, el and gas | 900 |
| B(b) | Depth, steam | 1100 |
| C | Height | 1760 |
| D | | 790 |
| E | | 155 |
| F | | 1505 |
| G | | 100 |
| H | | 170 |
| I | | 1505 |
| J | | 80 |
| K | | 395 |
| L | | 755 |
| M | | 585 |

- 1 Operating panel
- 2 Door opening ø 580 mm
- 3 Electrical connection
- 4 Gas connection
- 5 Exhaust connection
- 6 Steam: in
- 7 Steam: out


* Other voltages available, see installation manual.

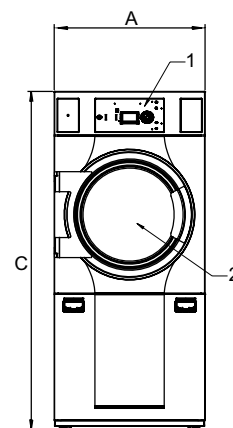

Front

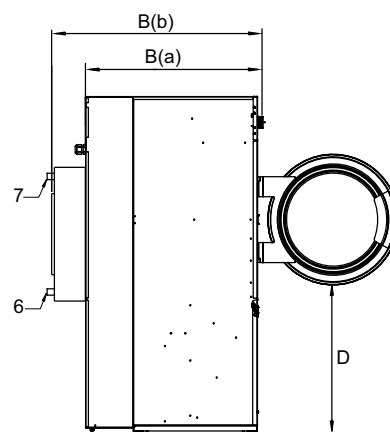

Side view

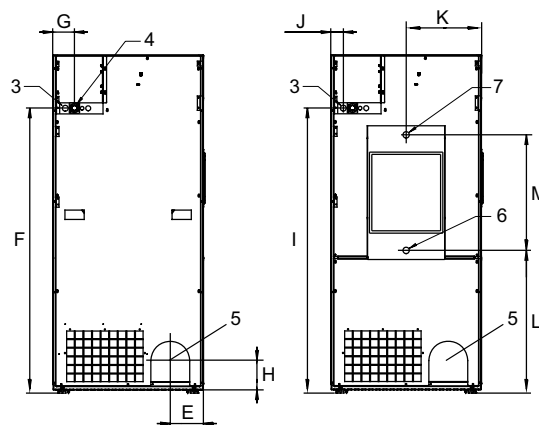

Rear